# **EXC-W80FRH** Multi-pixel LED Wall Washer



Application Environment: Indoor Outdoor

# Description

**EXC-W80FRH full color series** are high power outdoor landscape LED wall washer with high strength aluminum alloy housing by EXC-LED. EXC-W80FRH can be used for accent lighting or flood lighting, such as building facade, bridge, stage, etc. Customized lighting fixture length available.

### **Features**

- The newest generation technology: DMX512 parallel bus design
- Professional comb convection heat dissipation design
- Unique waterproof and breathable design
- Low thermal resistance path heat dissipation design
- Outdoor lightning protection and electrostatic discharge (ESD) protection design
- Projection distance: 1-7.5m

Basic Specifications	
Color Range	W(2200K-6500K), RGB, RGBW
Light Source	72, 24R+24G+24B, 18R+18G+18B+18W pcs LEDs
Working Voltage	AC 220V
Max. Power Consumption	120W(white), 150W(RGB, RGBW)
Control	DMX512, ON/OFF
Segment	1, 2(RGB, RGBW)
Grey Scale	8bit, 16bit
Source Life	50,000 h
RDM	Optional
LED chip Brand	Optional(Cree, OSRAM, Lumileds, Epistar, etc)
Housing	High Strength Aluminum
Cover	Tempered glass
Weight	6.0KG




Working Temperature	-40°C to 60°C
Storage Temperature	-40°C to 70°C
Protection Rating	IP66
Efficiency flux	≥70LM/W(White),≥45LM/W(RGBW),≥30LM/W(RGB)

6°,10°, 12\*22° and other angles optional

Host Controller	EXC-5200
Slave Controller	EXC-2905T1
Signal Cable	EXC-LED outdoor special cable


# **Light Intensity Distribution**

Beam Angle

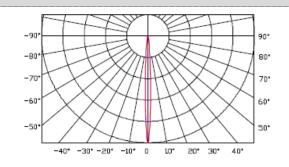

# --- CO/180 6°


#### --- C90/270 6°

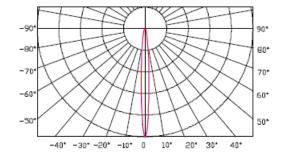

# **Light Intensity Chart**

# --- CO/180 10°



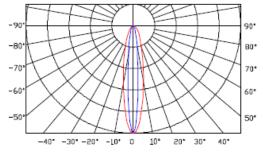



#### --- CO/180 SS\*

#### --- C90/270 12°

# 深圳爱克莱特科技股份有限公司 Shenzhen EXC-LED Technology Co., Ltd



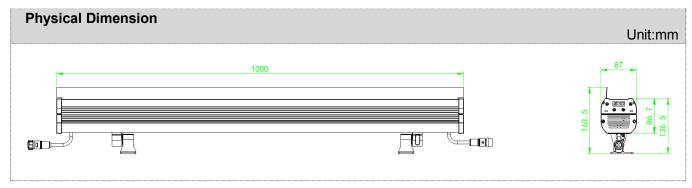

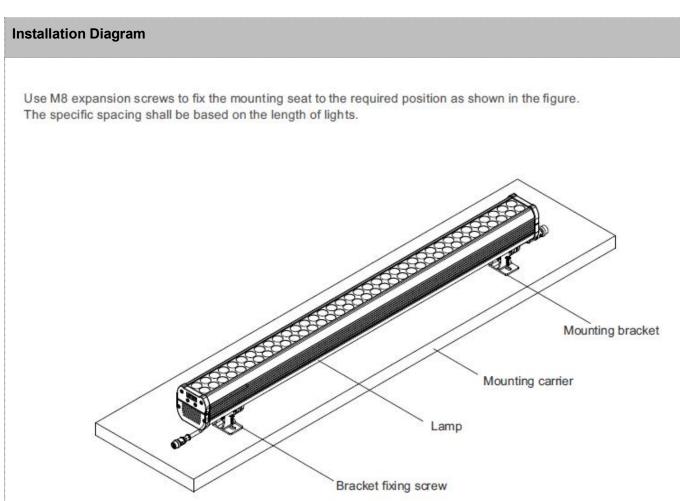





# System connection diagram:

- 1, Host controller should connect with slave controller. Working voltage for controllers are AC220V.
- 2,On-line main controller should connect with slave controller, on-line main controller and sub controller working voltage are AC220V.
- 3,Each sub-controller with 8 ports, with each port 512 pixels, supporting data converter, supports 100 meters ultra-long haul transmission.
- 4,The CAT-5 e. cable distance should be within 100 meters between host controller and slave controller, between slave controllers and switch, etc.

# **Online Controlling System Diagram**

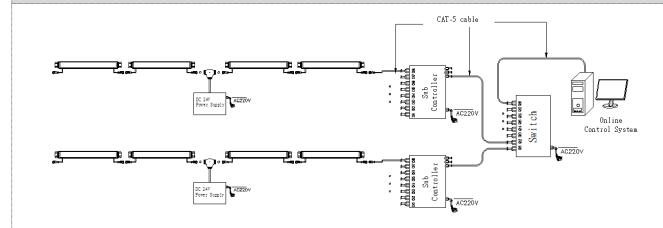

# Offline Controlling System Diagram

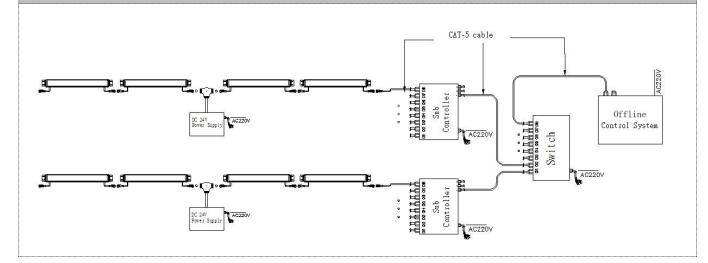




## Accessories:

1: Female and Male Connector( Connect to first dot light for signal transmission)



2: Y Shape Connector(For power Distribution)

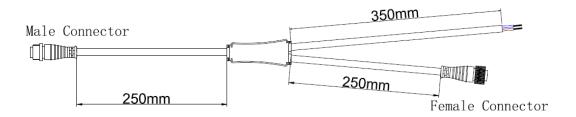

3: Interconnection Cable(1.3M,3M,5M is standard length)



4: End Cap

